

Fire Fox™

FR HELMET HOODS

23-6660

23-6660/XL


23-6660/LV



- Connectable to helmet
- Hook and loop closure
- 315 gr./m² flame retardant cotton

23-6660 / 23-6660LV : 64 cm.
23-6660XL: 68 cm.

23-6660 / 23-6660LV : 42 - 53 cm.
23-6660XL: 52 - 65 cm.




23-6660: 41 cm.
23-6660XL: 44 cm.
23-6660/LV: 62 cm.



Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2

TÜV BP 60097781 0002
TÜV 21220109 002



EN ISO 11611:2007
CLASS 1/A1+A2

Fire Fox™

FR COTTON DOO-RAGS AND BEANIE

23-8000

FR Beanie

23-3616 FR Doo-Rag

23-3613 FR Doo-Rag



- Often used in combination with helmet
- High comfort and flexibility
- Sweatband integrated in the front of the Doo-Rag
- 315 gr./m² flame retardant cotton

FR Beanie: 23-8000L

56-59 cm.

All Doo-Rags , one size fits all:

46-68 cm.



Fire Fox™

EN ISO 11611:2007
CLASS 1/A1+A2

TÜV BP 60097781 0002
TÜV 21220109 002




SWEATSOpad®

HELMET COMFORTER

“Most comfortable sweatband in the world”

- Helmet pad and sweatband combined in one piece air cushioned SWEATSOpad®
- Flame retardant
- No more “helmet head”!
- No more slippage!
- No more sweat!

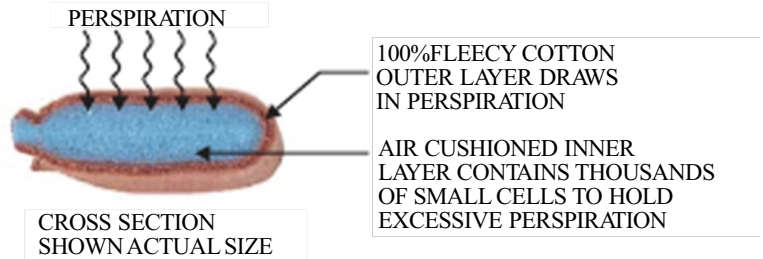


20-3100V



5 x

SWEATSOpad®

EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001



20-3100V 22 cm.


20-3200V



5 x

SWEATSOpad®

EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001



20-3200V 25 cm.

ACCESSORIES

44-7028 Heavy duty arm guard



- Heavy duty
- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- COMFOflex® lining used
- Hook and loop closure
- Inside 520 gr/m² flame retardant fabric



NEW
HEAVY DUTY

44-7028 35 cm. 32-41 cm. 35-45 cm.

44-7920



Heat and flame resistant split cow leather



- 50 x 50 x 8 cm.
- KEVLAR® 3 ply

44-7910



Heat and flame resistant canvas



- 50 x 50 x 8 cm.
- KEVLAR® 3 ply