

TitanTig 200P ACDC *Pro*



TIG MMA



AC
Current



DC
Current



1
Phase
Single
Phase



Energy
Efficient



2
Years
Machine
Warranty




Wireless
Ready

200 Amp Inverter ACDC TIG/Stick Welding Machine

- Easy and intuitive parameter selection
- Delivers a stable, consistent, smooth welding arc
- Fully adjustable Pulse
- Multi AC Waveform Output.
- Compact, Robust & lightweight
- Wireless Remote control option
- Variety of materials Steel, Stainless, Aluminium and more

WeldTronic
quality welding products

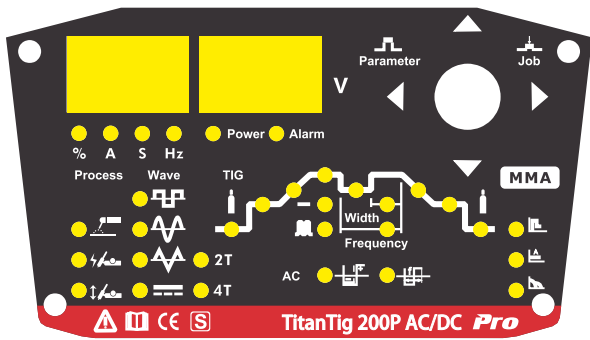

Control Panel

Potentiometer
Remote Control
Torch Standard

Wireless Remote
Control Ready

Wireless Foot
Control Ready



Pro



Optional Wireless
Hand Control



Optional Wireless
Foot Control

The TitanTig 200 Pro is a professional, microprocessor controlled inverter welding power source for AC Tig, DC Tig and MMA Applications. The use of IGBT technology delivers a compact and lightweight machine that is feature rich. High frequency ignition and a pulse function on both AC and DC modes makes this machine ideal for sheet metal and fine precision work.

The TitanTig 200 ACDC Pro incorporates a user-friendly control panel for logical operation. The Smart knob offers all the basic functions required in TIG welding, plus a great number of useful advanced features that improve the quality and productivity of welding. It is suitable for DC+ MMA, DC Tig & AC Tig Welding

Main Features

Adjustable Pulse	Smart Knob Operation
Adjustable Pre/Post Flow	Multi AC Waveform
Adjustable AC Balance	Adjustable Up/Down Slope

Process

AC TIG Welding	DC Stick Welding
DC TIG Welding	AC Square/Sine/Triangular

Package Inclusions

Power Source	4m Ergo Tig Torch + Remote
Argon Regulator	4m Earth Lead Set
Operators Manual	3m Gas Hose Set

Options/Upgrades

TTIGRFC	TitanTig Corded Foot Control
TTIGWFC	TitanTig Wireless Foot Control
TTIGWHC	TitanTig Wireless Hand Control

Ordering Information

TTIG200PACPRO/P1	TitanTig 200 ACDC Pro + 4m Torch Package
TTIG200PACPRO/P2	TitanTig 200 ACDC Pro + 8m Torch Package

Technical Data

Power Supply (V)	1~240±10% 50/60
Rated Input Kw	3.7(TIG) 5.7(MMA)
Rated Input Current (A)	22(TIG) 38(MMA)
Duty Cycle @40°C (AC)	35%@200A/100%@120A
Duty Cycle @40°C (DC)	40%@170A/100%@100A
No Load Voltage (V)	66
Welding Current Range	5-200 (AC) 5-170 (DC)
Up Slope/Down Slope (S)	0-10
Pre/Post Flow (S)	0.1-10/1-10
Pulse Frequency (Hz)	0.5-200
AC Frequency (Hz)	50-250
Pulse Width Range (%)	5-95
Clarence Effect (AC Tig)	15-50
Net Weight	10kg
Dimensions	420x135x250
Protection Class	IP 23
Warranty (Power Source)	2 Years