

TitanTig 200 DC Pulse **Pro**



TIG MMA



DC
Current



1
Phase
Single
Phase



Energy
Efficient



2
Years
Machine
Warranty



REMOTE
Wireless
Ready

200 Amp Inverter DC TIG/Stick Welding Machine

TIG DC / MMA Multi Process

Delivers a stable, consistent, smooth welding arc

Hot Start, Lift Arc, HF arc ignition, 2T/4T


Down slope & post flow

Fully adjustable Pulse

Wireless Remote control option

Refined arc ignition, stable and reliable arc

WeldTronic
quality welding products

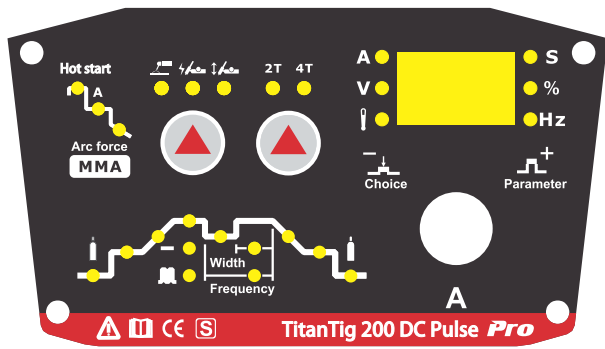

Control Panel

Potentiometer
Remote Control
Torch Standard

Wireless Remote
Control Ready

Wireless Foot
Control Ready

WeldTronic
quality welding products



Optional Wireless
Hand Control



Optional Wireless
Foot Control



The TitanTig 200 DC Pro is a professional, microprocessor controlled inverter welding power source for DC Tig and MMA Applications. The use of IGBT technology delivers a compact and lightweight machine that is feature rich. High frequency ignition and a pulse function makes this machine ideal for sheet metal and fine precision work.

The TitanTig 200 DC Pro incorporates a user-friendly control panel for logical operation . The control panel features basic functions required in TIG welding, plus a great number of useful advanced features that improve the quality and productivity of welding. It is suitable for DC+ MMA and DC Tig Welding.

Main Features

Adjustable Pulse	Simple to operate
Adjustable Pre/Post Flow	IGBT Inverter Technology
Wireless Remote Ready	Adjustable Up/Down Slope

Process

DC Lift TIG Welding	DC Stick Welding
DC HF TIG Welding	DC Pulse Welding

Package Inclusions

Power Source	4m Ergo Tig Torch + Remote
Argon Regulator	4m Earth Lead Set
Operators Manual	3m Gas Hose Set

Options/Upgrades

TTIGRFC	TitanTig Corded Foot Control
TTIGWFC	TitanTig Wireless Foot Control
TTIGWHC	TitanTig Wireless Hand Control

Ordering Information

TTIG200DCP/P1	TitanTig 200 DC Pro + 4m Torch Package
TTIG200DCP/P2	TitanTig 200 DC Pro + 8m Torch Package

Technical Data

Power Supply (V)	1~240±10% 50/60
Rated Input Kw	4.5(TIG)
Rated Input Current (A)	32(TIG) 45(MMA)
Power Factor	0.75
Duty Cycle @40°C (DC)	35%@170A/100%@100A
No Load Voltage (V)	74
Welding Current Range	10-200 (TIG)
Up Slope/Down Slope (S)	0-10
Pre/Post Flow (S)	0.2-10/0-10
Pulse Frequency (Hz)	0.5-200
Pulse Width Range (%)	5-95
Dimensions	410x146x278
Net Weight	5.5kg
Insulation Class	H
Protection Class	IP 23
Warranty (Power Source)	2 Years