

## Golden Brown™ CLOTHING



KEVLAR® 3 ply √



M in. 1 mm.

2 x Min. 1 mm.



1 x

Golden Brown™ products are made of high quality side split or grain cow leather  
 Golden Brown™ split leather products: pages 22, 23, 24, 25. Grain leather products: page 26.

### 44-2530 Jacket with flame retardant back



- Side split cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315gr./m<sup>2</sup>

44-2530M  
 44-2530L  
 44-2530XL  
 44-2530XXL  
 44-2530XXXL

76 cm.	100 cm.
81 cm.	112 cm.
86 cm.	124 cm.
91 cm.	136 cm.
96 cm.	148 cm.

**Golden Brown™**

Golden Brown™

EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079303 0001  
 TÜV 21190228 001

www.weldas.com

**EN ISO 11611:2007  
 CLASS 2/A1**

### 44-2847 Shoulder apron



- Side split cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.
- Special order item only.

44-2847L	92 cm.	58 cm.
44-2847XL	92 cm.	63 cm.

**Golden Brown™**

Golden Brown™

EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079303 0001  
 TÜV 21190228 001

www.weldas.com

**EN ISO 11611:2007  
 CLASS 2/A1**

## Golden Brown™ CLOTHING

### 44-2800 Cape sleeve



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2800L  
44-2800XL  
44-2800XXL




112 cm.  
124 cm.  
136 cm.



Golden Brown™

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079303 0001  
TÜV 21190228 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-28.. Apron for cape sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2828  
44-2836

71 cm. 56 cm.  
91 cm. 56 cm.



Golden Brown™

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-2142 Aprons



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

44-2142

107 cm. 60 cm.



Golden Brown™

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001,  
TÜV BP 60079303 0001  
TÜV 21190228 001,  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**

## Golden Brown™ CLOTHING

### 44-2106 Spats for leg and shoe protection



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover


44-2106

33-43 cm. 15 cm.



Golden Brown™

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-2114 Spats for leg and shoe protection



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-2114

37-47 cm. 36 cm.



Golden Brown™

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-2321, 44-2321XL Sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Hook and loop closure at the top
- Wrist-end with elastic band included


44-2321  
44-2321XL

52 cm. 21-31 cm. 34-47 cm.  
52 cm. 21-31 cm. 45-60 cm.



Golden Brown™


EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079313 0001  
TÜV 21190282 001



**EN ISO 11611:2007  
CLASS 2/A1**



## Yellowjacket® CLOTHING

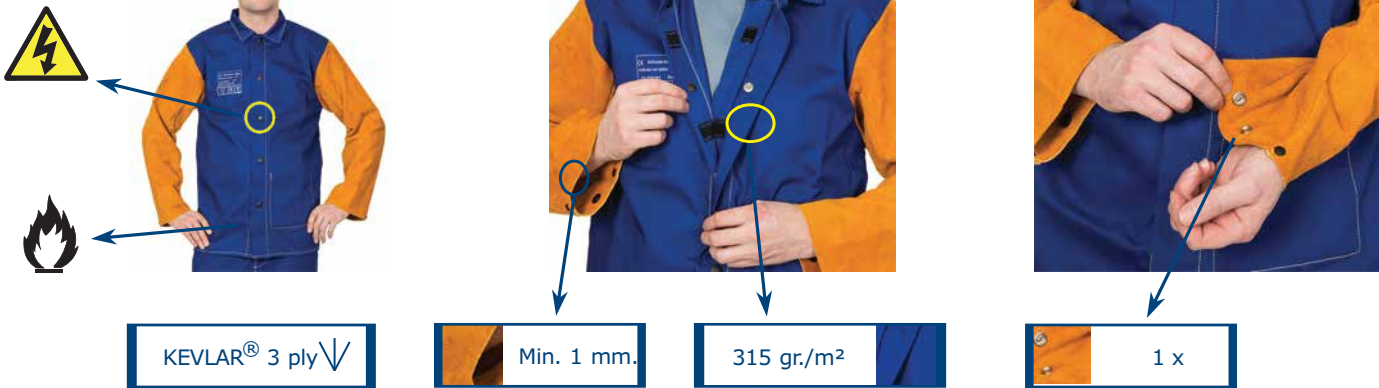

KEVLAR® 3 ply ✓

Min. 1 mm.

315 gr./m<sup>2</sup>

1 x

Yellowjacket® product is made of 315 gr./m<sup>2</sup> flame retardant cotton body and split cow leather sleeves

### 33-3060 Jacket, flame retardant cotton with leather sleeves




- 315 gr./m<sup>2</sup> flame retardant cotton body
- split cow leather sleeves
- KEVLAR® 3 ply ✓

Yellowjacket®

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079303 0001  
TÜV 21190228 001



33-3060S	76 cm.	108 cm.
33-3060M	76 cm.	116 cm.
33-3060L	81 cm.	127 cm.
33-3060XL	86 cm.	138 cm.
33-3060XXL	91 cm.	147 cm.
33-3060XXXL	96 cm.	158 cm.
33-3060XXXXL	96 cm.	168 cm.



EN ISO 11611:2007  
CLASS 2/A1

