


LAVAshield® WELDING BLANKETS

50-1866

50-2368/2468

50-3068

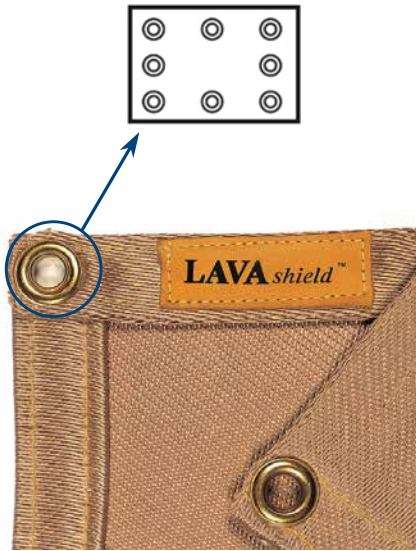

- Silica fabric
- 174 x 174 cm.
- 1260°C
- 600 gr./m²
- KEVLAR® 3 ply

- Black fiberglass
- Neoprene / neoprene coating
- 174 x 234 cm.
- 538°C
- 800 gr./m²
- KEVLAR® 3 ply

- Gold fiberglass
- Acryl / neoprene coating
- 174 x 234 cm.
- 538°C
- 1000 gr./m²
- KEVLAR® 3 ply

LAVAshield® CONNECTABLE WELDING SCREENS

55-6218 Orange/Red



55-6218 1.37 x 1.8 mtr.

- Connectable welding screen
- Heat sealed seams




NEW

Incl. 9 rings (Ø 50 mm.)

LAVAshield®

EN 1598 : 2011
ECS: 00101-ECS-13



55-7218 Green



55-7218 1.37 x 1.8 mtr.

- Connectable welding screen
- Heat sealed seams



NEW

Incl. 9 rings (Ø 50 mm.)

LAVAshield®

EN 1598 : 2011
ECS: 00102-ECS-13

